


Embranchement boule 88,5° Geberit PE à trois départs, raccords 90° déportés

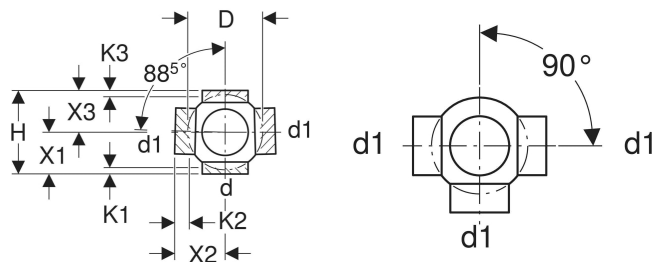

Exemple d'image

UTILISATION

- Pour l'évacuation des bâtiments

CARACTÉRISTIQUES

- Résistant aux UV

CARACTÉRISTIQUES TECHNIQUES

Matériau

PE-HD

N° de réf.	DN	d, ø mm	d1, ø mm	arc °	arc2 °	D cm	H cm	X1 cm	X2 cm	X3 cm	K1 max. cm	K2 max. cm	K3 max. cm
364.605.16.1	60 / 60	63	63	88.5	90	10	16	8	10	8	1.5	4.5	1.5
365.605.16.1	70 / 70	75	75	88.5	90	12	16	8	10	8	1.5	3.5	1.5
366.605.16.1	80 / 80	90	90	88.5	90	14	18	9	11	9	2	4	2
367.605.16.1	100 / 100	110	110	88.5	90	17	20	10	12	10	1.5	4	1.5
368.605.16.1	125 / 100	125	110	88.5	90	18	20	10	12	10	1.5	4	1.5
369.605.16.1	150 / 100	160	110	88.5	90	23	25	12.5	16	12.5	2	1.5	2